

SHZF3 SCR SERIES

POWER CONTROLS

The SHZF3 SCR Series are three-phase, zero-fired SCR Power Controls designed to deliver maximum power control with all of the features normally found in much larger units. Utilizing only two frame sizes, these units are conservatively engineered for years of trouble free service while providing the benefits of precise, reliable control of for your electronic process.

The SHZF3 SCR Series accepts all standard voltage and current command signals or remote potentiometer input. The 4-20 mA command signal is optically isolated. Standard operating voltages are 120, 240, 400, 480 & 575 Vac, 3 Phase, 50/60Hz.

Multi-turn Zero and span adjustments are provided for matching the SCR power control to the command signal. Control power, command signal and blown fuse indicators are provided as means for trouble shooting. The control power indicator (red) indicates power has been applied to the unit. The command signal indicators' (green) brilliance is proportional to the output voltage. The blown fuse indicators (3-yellow) light if a fuse is cleared (60-225 A).

Applications:

Primarily used to control static resistive or non-inductive 3 or 4 wire loads.

- Small electric furnaces
- Electric ovens, kilns, heaters
- Extrusion or injection molding

15-225 Amperes
Three-phase (3 or 4 Wire)
Zero-fired



- 5 year "No Hassle" warranty
- Electrically Isolated Heatsink
- Compact Size
- Conservative Thermal Design
- Voltage Squared Linearity
- Line voltage compensation
- Transient voltage Protection (RC & MOV)
- 1400 PIV SCRs
- Semiconductor (I²T) Fuse
- Diagnostic Indicators
- Optically Isolated input Command Signal (4-20 mA)
- Multi-Turn Zero & Span Adjustments
- UL, cUL Listed, CE Compliant
- Fan Cooled (90 A and higher)



100kA
SCCR



ISO
9001
 QUALITY
 ASSURANCE

AMETEK[®]
 HDR POWER SYSTEMS

530 Lakeview Plaza Blvd Ste C
 Worthington, Ohio 43085
 Toll Free: 1-888-PWR-CNTR (797-2685)
 Phone: 614-308-5500
 Fax: 614-308-5506
 www.hdrpower.com

SPECIFICATIONS:

Control Method: Zero-firing of six back-to-back SCRs (3-leg control)

Voltage Rating: 120, 240, 400, 480, 575 Vac

Line Frequency: 50 or 60 Hz

Current Ratings: 15, 25, 30, 60, 90, 120, 180, 225 Amperes

Command Signal: Most standard process signals

Adjustments: Zero and Span, multi-turn

Linearity: Output is linear within 2% of span over entire range of control

Isolation: 2500 volts rms from power circuit to command signal and to ground

Overtemp Protection: Heatsink thermostat provided on 90 A and higher models

Ambient Temperature: Operating: 0 °C to 50 °C

Relative humidity: 0 to 95% (non-condensing)

HOW TO ORDER:

Make a selection from each of the tables below. Place the selection in the corresponding boxes to build your model.

SHZF3 - - - -

VOLTAGE*		CURRENT		OPTIONS		COMMAND	
120 Vac	<input type="text" value="120"/>	15 A	<input type="text" value="15"/>	N.O. Thermostat ◊	<input type="text" value="NO"/>	4-20 mA	<input type="text" value="01"/>
240 Vac	<input type="text" value="240"/>	25 A	<input type="text" value="25"/>	N.C. Thermostat ◊	<input type="text" value="NC"/>	0-10 Vdc	<input type="text" value="02"/>
400 Vac	<input type="text" value="400"/>	30 A	<input type="text" value="30"/>	SCR Failure	<input type="text" value="SF"/>	0-5 Vdc	<input type="text" value="03"/>
480 Vac	<input type="text" value="480"/>	60 A	<input type="text" value="60"/>	Load unbalance Alarm	<input type="text" value="UB"/>	Auto/Manual	<input type="text" value="04"/>
575 Vac	<input type="text" value="575"/>	90 A	<input type="text" value="90"/>	Multiple options may be selected		Manual Pot Input [^]	<input type="text" value="05"/>
		120 A	<input type="text" value="120"/>			Others	<input type="text" value="06-99"/>
		180 A	<input type="text" value="180"/>				
		225 A	<input type="text" value="225"/>				


* Other voltages available

◊ Thermostat included above 60 A, specify N.O. or N.C.

[^] Manual Pot requires external potentiometer (5 kΩ)


OUTLINES:

15, 25 A

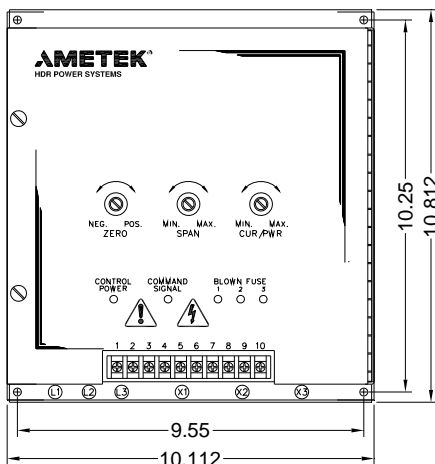

Depth: 6.376 in
Weight: 11 lbs

30 thru 225

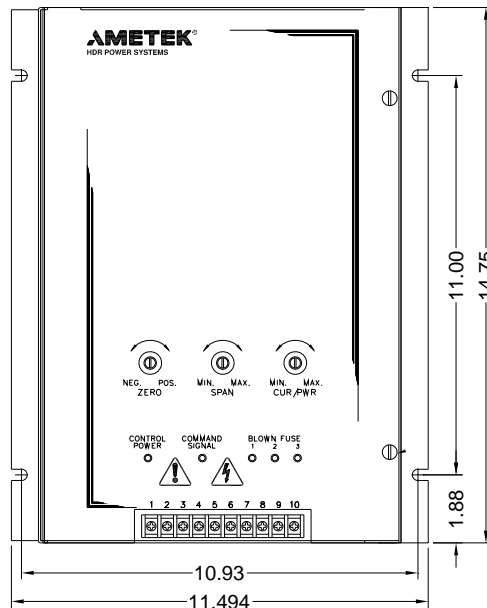

Depth: 9.5 in
Weight: 33 lbs